

Y-STRAINER

FEMALE – FEMALE

- CW617N-4MS brass - reduced lead and nickel content
- high cleaning accuracy

FERRO®




F•V

Y-strainer

- female - female
- material of body: CW617N-4MS brass
- material of filter: AISI304 stainless steel
- mesh size of filter insert:
 - 0,48 mm² - DN15-50
 - 1,44 mm² - DN60-100
- for use in cold and hot water systems and in heating and cooling systems where the operating medium is water or water-glycol solution (up to 50%)
- nominal pressure: 16 bar (PN16)
- maximum operating temperature: 120°C

Construction diagram
of the FERRO F•V
slanted mesh filters →

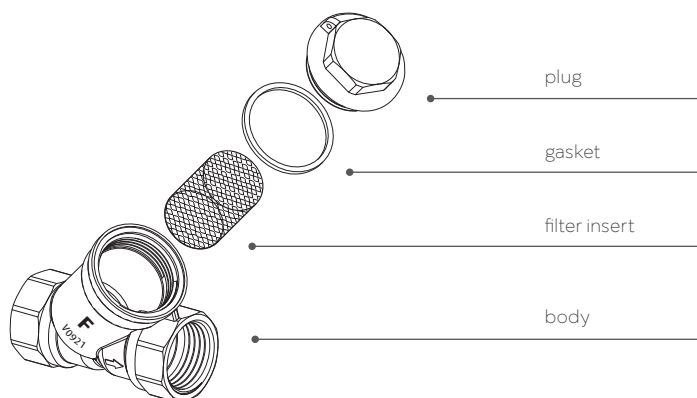

DN	A [mm]	B [mm]	C [cal]	D [mm]	E [mm]	Index
15	54	40,8	G1/2	12	10,5	F02V
20	73	52,9	G3/4	13,5	12	F03V
25	84	59,5	G1	16	14,5	F06V
32	95	72,6	G1 1/4	17,5	15,5	F04V
40	110	79,8	G1 1/2	19	18	F05V
50	123	92,3	G2	21	19	F07V
65	134	119	G2 1/2	22	18,5	F08V
80	156,5	135	G3	26	21	F09V
100	178	170	G4	27,5	25	F10V

