


Code: **IC8TH**

3/4" exchangers with insulation for installations with a thermo fireplace or solid fuel boiler

<https://www.ferrocompany.com/product-2997-IC8TH.html>

Individual packaging: **1, package with bar code allowing for retail sale**

Collective packaginig: -

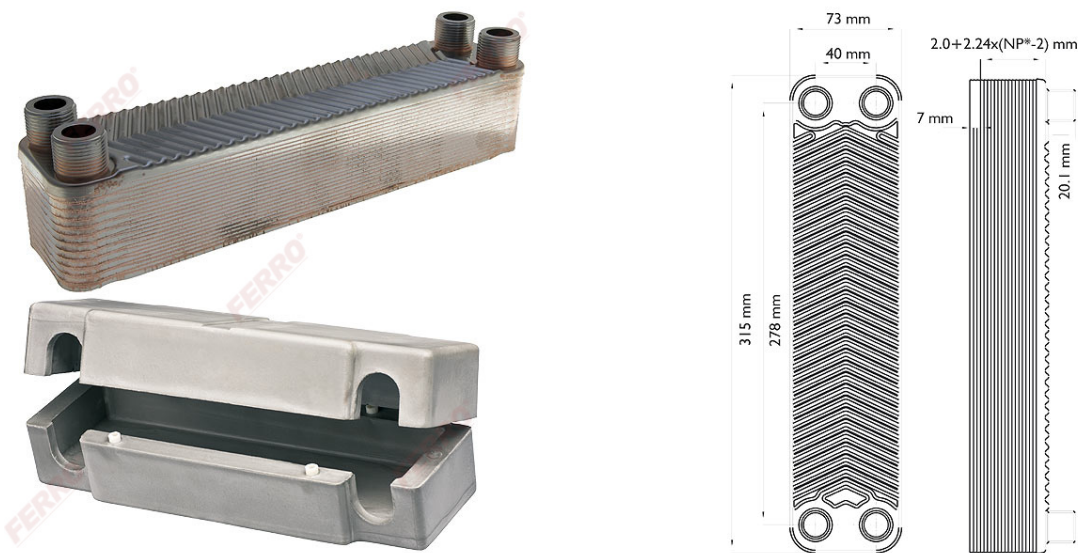

- liquids: up to 40% glycol solution
- application:
 - central heating systems
 - thermal chimney
 - solid fuel boilers
 - hot water systems
 - solar systems
- Characteristics:
 - flow rate: 4 m³/h (max)
 - working pressure: 16 bar (max)
 - working temperature: 135°C (max)
 - testing pressure: 20 bar
 - connections: 3/4" male thread
- NP* - number of plates

Index	Power range [kW]	Heat source side [°C]	Installation side [°C]	Individ. pack.	Bulk pack.
IC8THx10	10-15	90/70 85/65 80/60	50/70 45/65 40/60	1	-
IC8THx20	15-25			1	-
IC8THx24	25-30			1	-
IC8THx30	35-45			1	-