


Code: **IC8TH**

Insulated exchangers with insulation for solar systems containing 40% propylene glycol

<https://www.ferrocompany.com/product-4251-IC8TH.html>

Individual packaging: **1, package with bar code allowing for retail sale**

Collective packaginig: -

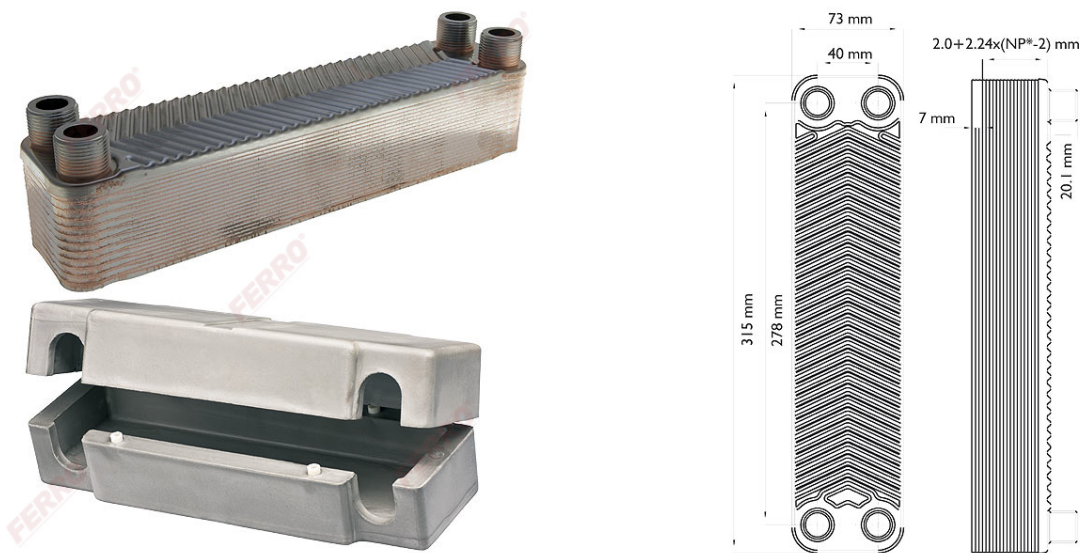

- liquids: up to 40% glycol solution
- application:
 - central heating systems
 - thermal chimney
 - solid fuel boilers
 - hot water systems
 - solar systems
- Characteristics:
 - flow rate: 4 m³/h (max)
 - working pressure: 16 bar (max)
 - working temperature: 135°C (max)
 - testing pressure: 20 bar
 - connections: 3/4" male thread
- NP* - number of plates

Index	Power range [kW]	Heat source side [°C]	Installation side [°C]	Individ. packag.	Collect. packag.
IC8THx20	4	80/40	30/65	1	-
IC8THx24	8			1	-
IC8THx30	12			1	-