


Code: **FxxV**

Y-strainer

<https://www.ferrocompany.com/product-6558-FxxV.html>

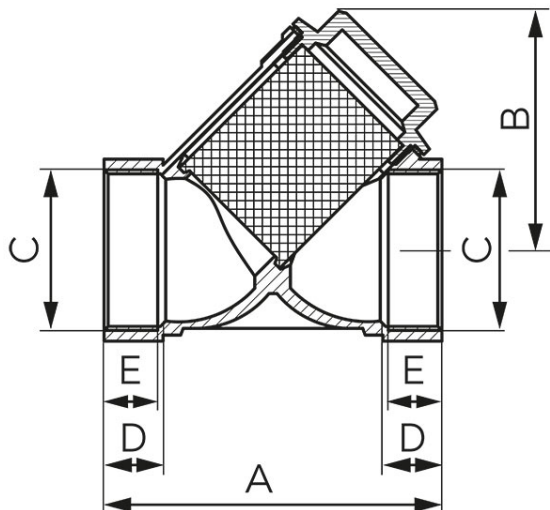

- female - female
- material of body: CW617N-4MS brass
- material of filter: AISI304 stainless steel
- mesh size of filter insert: 0,48 mm² - DN15-50 1,44 mm² - DN60-100
- for use in cold and hot water systems and in heating and cooling systems where the operating medium is water or water-glycol solution (up to 50%)
- nominal pressure: 16 bar (PN16)
- maximum operating temperature: 120°C
- NICKEL FREE - all product elements which may have contact with potable water are not covered with nickel
- CW617N-4MS brass - the latest hygienic standard
- media valves: water, glykol 50%

Index	DN	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	Individ. pack.	Bulk pack.
F02V	15	54	40,8	G1/2	12	10,5	18	144
F03V	20	73	52,9	G3/4	13,5	12	12	96
F06V	25	84	59,5	G1	16	14,5	8	64
F04V	32	95	72,6	G1 1/4	17,5	15,5	6	36
F05V	40	110	79,8	G1 1/2	19	18	4	32
F07V	50	123	92,3	G2	21	19	2	10
F08V	65	134	119	G2 1/2	22	18,5	1	8
F09V	80	156,5	135	G3	26	21	1	6
F10V	100	178	170	G4	27,5	25	1	4