


Code: **FxxM**

Magnet Y-strainer

<https://www.ferrocompany.com/product-6559-FxxM.html>

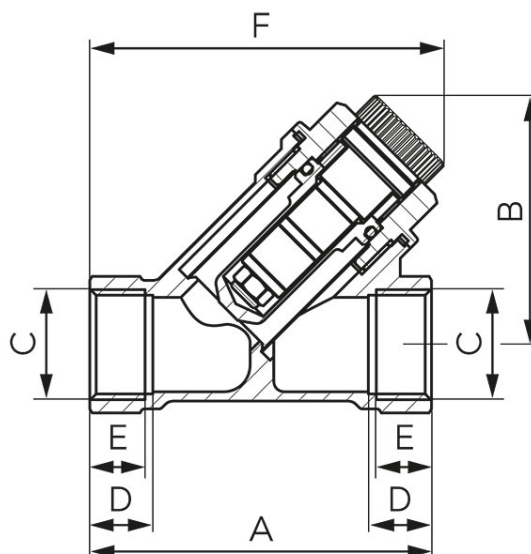

- female - female
- material of filter: AISI304 stainless steel
- mesh size of filter insert: 0.36 mm²
- neodymium magnet N35 (6000 -9500 GS)
- magnet housing: CW617N - 4MS
- for use in cold and hot water systems and in heating and cooling systems where the operating medium is water or water-glycol solution (up to 50%)
- nominal pressure: 16 bar (PN16)
- maximum operating temperature: 100°C
- NICKEL FREE - all product elements which may have contact with potable water are not covered with nickel
- CW617N-4MS brass - the latest hygienic standard
- media valves: water, glikol 50%

Index	DN	A [mm]	d [mm]	B [mm]	C [cal]	D [mm]	E [mm]	Individ. pack.	Bulk pack.
F02M	15	65	47,4	G1/2	12	10,5	67,4	12	96
F03M	20	76	54,8	G3/4	13,5	12	77,8	10	80
F06M	25	84	56,9	G1	15	13,5	81,9	8	64
F04M	32	95	72,7	G1 1/4	17,5	15,5	97,7	6	36
F05M	40	105	76,9	G1 1/2	17,5	15,5	105,9	4	32
F07M	50	121	88,5	G2	21	19	116,7	2	10